

iC-LF1401 OBGA LF3C

PACKAGE SPECIFICATION



Rev C1, Page 1/4

ORDERING INFORMATION

Type	Package	Options	Order Designation
iC-LF	optoBGA™ LF3C	none	iC-LF OBGA LF3C




9.5 mm x 4.2 mm

PIN CONFIGURATION

PIN FUNCTIONS

(top view)



No. Name Function

1	SI	Start Integration Input
2	CLK	Clock Input
3	AO	Analogue Output
4	VCC	+5 V Supply Voltage
5	RSET	Bias Current Adjust
6	AGND	Analog Ground
7	GND	Digital Ground
8	DIS	Disable Integration Input

ABSOLUTE MAXIMUM RATINGS

Item No.	Symbol	Parameter	Conditions	Fig.				Unit
					Min.	Typ.	Max.	
TG1	Ta	Operating Ambient Temperature Range			-40		100	°C
TG2	Ts	Storage Temperature Range			-40		115	°C
TG3	Tpk	Reflow Soldering Peak Temperature	tpk < 20 s, convection reflow				245	°C
			tpk < 20 s, vapour phase					
			TOL (time on label) 8 h; please refer to Customer Information #7 for details					

© 2010


iC-LF1401 OBGA LF3C

PACKAGE SPECIFICATION




Rev C1, Page 2/4


PHYSICAL DIMENSIONS (given in mm)

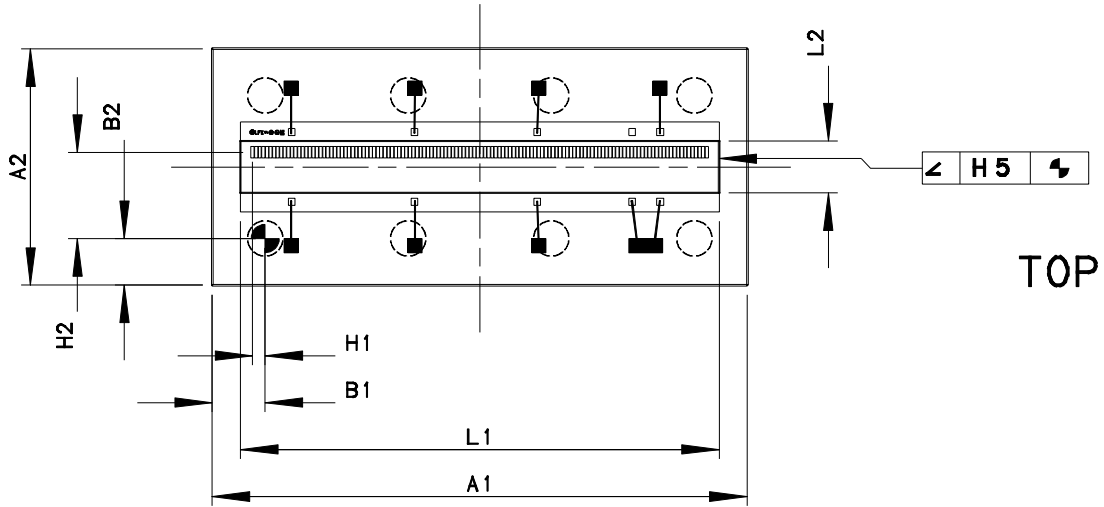

TOP

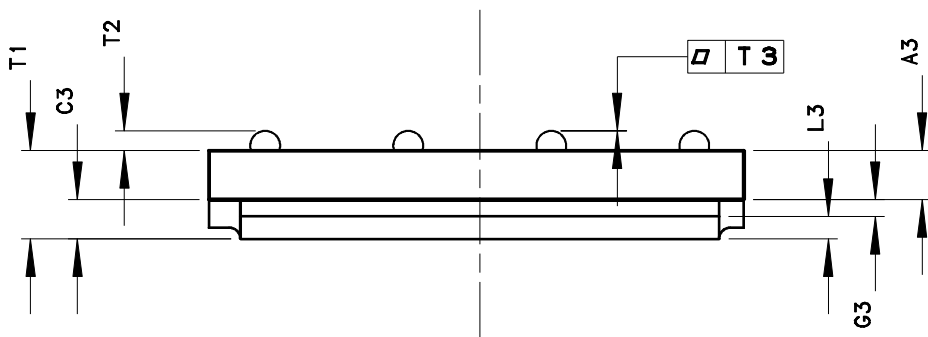

SIDE

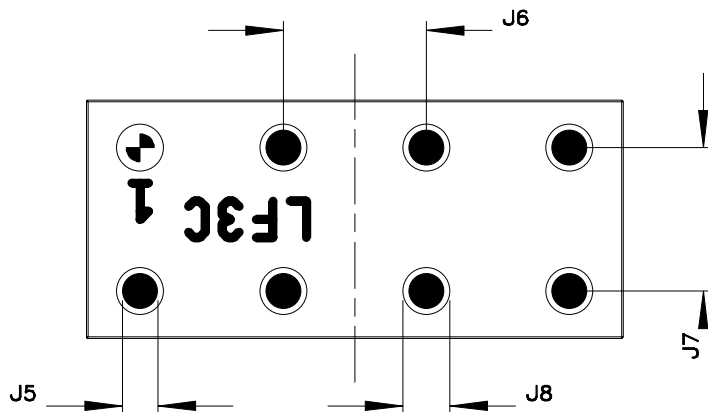

BOTTOM

iC-LF1401 OBGA LF3C

PACKAGE SPECIFICATION



Rev C1, Page 3/4

DIMENSION TABLE

Item	Parameter	Comments	Min.	Typ.	Max.	Tolerance	Unit
Substrate							
A1	Outline X			9.5		±0.1	mm
A2	Outline Y			4.2		±0.1	mm
A3	Substrate Thickness	bottom package to bottom die	0.783	0.87	0.957		mm
Reference							
B1	Outline vs. Reference X	bottom left lead center is reference		0.94		±0.1	mm
B2	Outline vs. Reference Y	bottom left lead center is reference		0.83		±0.1	mm
Encapsulation							
C3	Mold Thickness	note ¹⁾	0.445		0.755		mm
Chip Placement							
G3	Chip Thickness			0.3		±0.025	mm
H1	Chip Position vs. Reference X	reference vs. center of 1st sensor		0.223		±0.175	mm
H2	Chip Position vs. Reference Y	reference vs. center of 1st sensor		1.529		±0.175	mm
H5	Chip Tilt Angle vs. Paddle					±1.6	DEG
Bottom Metal Pattern							
J5	Lead Size			0.635		±0.03	mm
J6	Lead Pitch X (or Lead-Lead Distance X)			2.54			mm
J7	Lead Pitch Y (or Lead-Lead Distance Y)			2.54			mm
J8	Solder Stop Off			0.835		±0.1	mm
Glass Cover							
L1	Glass Size X			8.5		±0.05	mm
L2	Glass Size Y			0.92		±0.05	mm
L3	Glass Thickness			0.4		±0.03	mm
Thickness Specifications							
T1	Overall Thickness	note ¹⁾ , bottom substrate to top of glass	1.428		1.712		mm
T2	Solder Ball Height	drawing not to scale	0.36		0.5		mm
T3	Solder Ball Coplanarity					±0.05	mm

Notes: ¹⁾ nominal glass cover thickness of 0.4 mm

iC-LF1401 OBGA LF3C

PACKAGE SPECIFICATION



Rev C1, Page 4/4

REVISION HISTORY

Rev	Notes	Pages affected
A1	Initial version	all
B1	RoHS compliance	1, 4
C1	Convection reflow soldering peak temperature reduced to 245 °C	1, 4

GENERAL HANDLING INSTRUCTIONS

After opening the dry pack, devices must be mounted within 8 hours (in factory conditions of maximum 30 °C/60% RH) or must be stored at < 10% RH. Devices require baking before mounting if the Humidity Indicator Card shows > 10% when read at 23 °C ±5 °C or if the conditions mentioned above are not met. Devices may be baked for 72 hours at 100 °C using high-temperature device containers (trays).

Samples

Samples are not subject to dry pack delivery and are not intended for reflow soldering. Remove any protective film – if present – before tempering or soldering. Use tweezers, pull upwards slowly, any horizontal pulling must be avoided. Do not touch the iC surface after removing the film. Never press on the iC coating.

iC-Haus expressly reserves the right to change its products and/or specifications. An Infoletter gives details as to any amendments and additions made to the relevant current specifications on our internet website www.ichaus.de/infoletter; this letter is generated automatically and shall be sent to registered users by email.

Copying – even as an excerpt – is only permitted with iC-Haus approval in writing and precise reference to source.

iC-Haus does not warrant the accuracy, completeness or timeliness of the specification on this site and does not assume liability for any errors or omissions in the materials. The data specified is intended solely for the purpose of product description. No representations or warranties, either express or implied, of merchantability, fitness for a particular purpose or of any other nature are made hereunder with respect to information/specification or the products to which information refers and no guarantee with respect to compliance to the intended use is given. In particular, this also applies to the stated possible applications or areas of applications of the product.

iC-Haus conveys no patent, copyright, mask work right or other trade mark right to this product. iC-Haus assumes no liability for any patent and/or other trade mark rights of a third party resulting from processing or handling of the product and/or any other use of the product.

As a general rule our developments, IPs, principle circuitry and range of Integrated Circuits are suitable and specifically designed for appropriate use in technical applications, such as in devices, systems and any kind of technical equipment, in so far as they do not infringe existing patent rights. In principle the range of use is limitless in a technical sense and refers to the products listed in the inventory of goods compiled for the 2008 and following export trade statistics issued annually by the Bureau of Statistics in Wiesbaden, for example, or to any product in the product catalogue published for the 2007 and following exhibitions in Hanover (Hannover-Messe).

We understand suitable application of our published designs to be state-of-the-art technology which can no longer be classed as inventive under the stipulations of patent law. Our explicit application notes are to be treated only as mere examples of the many possible and extremely advantageous uses our products can be put to.