

MB4U

BiSS, SSI, PC-USB 2.0 ADAPTER

FEATURES

USB 2.0 high speed PC interface
FPGA based logic
Hardware implemented interface protocols
Fast realtime data communication (10 MHz *BiSS*; 4 MHz SSI)
API for Windows: *BiSS*-Interface DLL
Field capable design: box, field interfaces, USB bus powerable
USB powered 5 V and 12 V supplies for external applications
Supported interfaces:
BiSS / SSI controlled by FPGA application

APPLICATIONS

BiSS / SSI application development
BiSS / SSI debugging
Flexible interface configuration
Encoder calibration
Portable applications

SYSTEM VIEW



MB4U

BiSS, SSI, PC-USB 2.0 ADAPTER

DESCRIPTION


The MB4U is a PC-USB 2.0 high speed interface *BiSS* master based on FPGA logic system design.

BiSS Interface Functions and Features:

- Up to 8 *BiSS* slaves
- RS422 10 MBit/s maximum data transfer rate
- SSI master
- *BiSS* C unidirectional and *BiSS* C master
- *BiSS* master MB100 *BiSS* IP based
- USB 2.0 interface up to 30 MBit/s data transfer
- USB 1.1 interface compatibility to 12 MBit/s data transfer
- Adapter and devices bus powerable
- Available drivers for Windows 2000, XP, Vista, 7
- FPGA integrated 1st level RAM

CONNECTORS


PIN CONFIGURATION *BiSS*

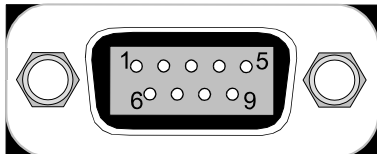

PIN FUNCTIONS

No.	Name	Function
1	VB	Field power supply
2	MA+	Clock output P
3	MA-	Clock output N
4	VDD	Logic power supply
5	MO-	Master data output N
6	GND	Ground (0 V)
7	SL+	Device data input P
8	SL-	Device data input N
9	MO+	Master data output P

PIN CONFIGURATION Mini USB



PIN FUNCTIONS

No.	Name	Function
1	VCC	5 V USB supply
2	D-	Data -
3	D+	Data +
4	ID	Identifier: A = GND, B n.c.
5	GND	Ground (0 V)

MB4U

BiSS, SSI, PC-USB 2.0 ADAPTER

preliminary



Rev B2, Page 3/5

ABSOLUTE MAXIMUM RATINGS

Beyond these values damage may occur; device operation is not guaranteed.

Item No.	Symbol	Parameter	Conditions	Min. Max.		Unit
				Min.	Max.	
G001	Power USB	Maximum Power Consumption from USB Bus	see USB specifications		500	mA
G002	VDD	Logic Power Supply		4.0	5.5	V
G003	I(VDD)	Logic Power Supply	VDD = 5 V, I(VB) = 0 mA	250	350	mA
G004	VB	Interface Power Supply		9	13	V
G005	I(VB)	Interface Power Supply	VB = 12 V, I(VDD) = 0 mA	90	125	mA

THERMAL DATA

Item No.	Symbol	Parameter	Conditions	Min. Typ. Max.			Unit
				Min.	Typ.	Max.	
T01	Temp	Temperature Range		0		50	°C
T02	HUM	Humidity	non condensating	5		95	%

All voltages are referenced to ground unless otherwise stated.

All currents flowing into the device pins are positive; all currents flowing out of the device pins are negative.

MB4U

BiSS, SSI, PC-USB 2.0 ADAPTER

preliminary



Rev B2, Page 4/5

BiSS POWER SUPPLY CONTROL

The MB4U supplies VB and VDD voltages with allocating and initializing the adapter. With closing the adapter resource or the software the voltages are turned off to permit a safe unplugging of connected de-

vices. The unpowering of VB and VDD requires a non volatile content storing before closing the interface adapter in any software environment.

BiSS MASTER IP MB100

The MB4U is based on the MB100 BiSS master IP. With this implementation it is possible to connect one or more BiSS C devices or a single SSI device to the adapter. BiSS C protocol is fully supported. The adapter supports an unlimited count of BiSS C slave devices.

With BiSS there is 10 MBit/s RS422 maximum clocking available. The SSI protocol is also configurable.

With high speed buffered transfer the real-time measured data can be block-wise transferred to a Windows PC application for analysis, documentation, data processing, etc..

BiSS SOFTWARE ENVIRONMENT

iC-Haus Evaluation Software

iC-Haus BiSS software for PCs running on Windows operating systems as well as the required USB and/or LPT driver are available as a ZIP file. iC-Haus software built with LabVIEW™ requires the installation of the LabVIEW™ Run-Time Engine (RTE).

MB4U capable software and product DLLs are available on request (BiSS Reader GUI, iC-MN GUI, iC-LGC GUI, iC-NQC GUI, iC-MH GUI).

iC-Haus BiSS Interface DLL

For custom software running on Windows operating systems the BiSS Interface DLL enables rapid software development. Direct access to eval board adapter and high level protocol functions are directly available.

BiSS Interface DLL: availability on request

iC-Haus expressly reserves the right to change its products and/or specifications. An info letter gives details as to any amendments and additions made to the relevant current specifications on our internet website www.ichaus.de/infoletter; this letter is generated automatically and shall be sent to registered users by email.

Copying – even as an excerpt – is only permitted with iC-Haus' approval in writing and precise reference to source.

iC-Haus does not warrant the accuracy, completeness or timeliness of the specification and does not assume liability for any errors or omissions in these materials.

The data specified is intended solely for the purpose of product description. No representations or warranties, either express or implied, of merchantability, fitness for a particular purpose or of any other nature are made hereunder with respect to information/specification or the products to which information refers and no guarantee with respect to compliance to the intended use is given. In particular, this also applies to the stated possible applications or areas of applications of the product.

iC-Haus conveys no patent, copyright, mask work right or other trade mark right to this product. iC-Haus assumes no liability for any patent and/or other trade mark rights of a third party resulting from processing or handling of the product and/or any other use of the product.

As a general rule our developments, IPs, principle circuitry and range of Integrated Circuits are suitable and specifically designed for appropriate use in technical applications, such as in devices, systems and any kind of technical equipment, in so far as they do not infringe existing patent rights. In principle the range of use is limitless in a technical sense and refers to the products listed in the inventory of goods compiled for the 2008 and following export trade statistics issued annually by the Bureau of Statistics in Wiesbaden, for example, or to any product in the product catalogue published for the 2007 and following exhibitions in Hanover (Hannover-Messe).

We understand suitable application of our published designs to be state-of-the-art technology which can no longer be classed as inventive under the stipulations of patent law. Our explicit application notes are to be treated only as mere examples of the many possible and extremely advantageous uses our products can be put to.

MB4U

BiSS, SSI, PC-USB 2.0 ADAPTER

preliminary



Rev B2, Page 5/5

ORDERING INFORMATION

Type	Package	Order Designation
MB4U	105 mm x 33 mm x 16 mm Aluminium blue anodized	iC-MB4 iCSY MB4U

For technical support, information about prices and terms of delivery please contact:

iC-Haus GmbH
Am Kuemmerling 18
D-55294 Bodenheim
GERMANY

Tel.: +49 (61 35) 92 92-0
Fax: +49 (61 35) 92 92-192
Web: <http://www.ichaus.com>
E-Mail: sales@ichaus.com

Appointed local distributors: http://www.ichaus.com/sales_partners