

iC-TL85 TO46-2F

Infrared LED



Rev B2, Page 1/4


FEATURES

Emission peak at 850 nm matched to silicon sensors
Temperature range -40 to 125 °C
High optical output power
Fast switching speed
TO-46 package with flat window for high reliability
ROHS conform

APPLICATIONS


Illumination for high resolution optical encoder
Modulated light barriers

PACKAGES



TO46-2F

DIMENSIONAL OUTLINE

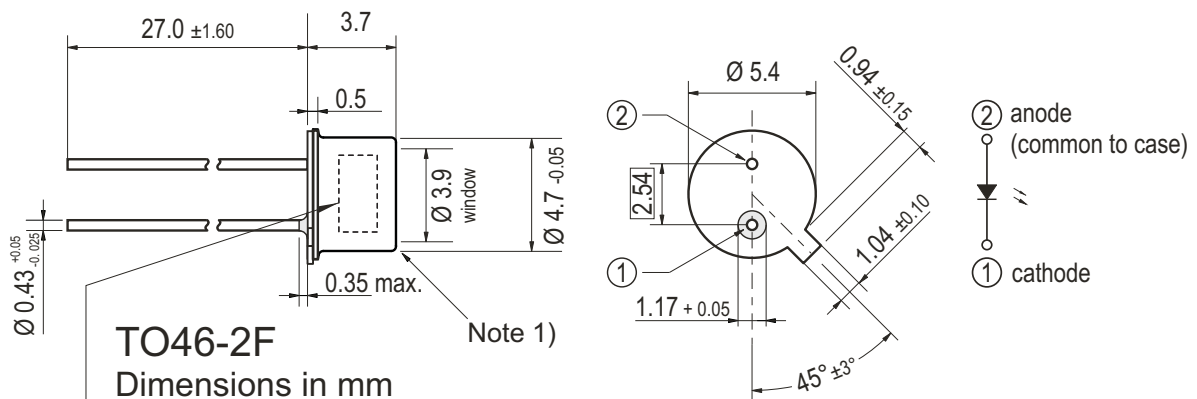

1) Flat window cap TO-52
(see SCHOTT SL 10.023.901 specification for details)

Marking (orientation subject to change)

iC-TL85 <design version>
<assembly code>

iC-TL85 TO46-2F

Infrared LED



Rev B2, Page 2/4

ABSOLUTE MAXIMUM RATINGS

Beyond these values damage may occur ($T_a = 25^\circ\text{C}$, unless otherwise noted)

Item No.	Symbol	Parameter	Conditions			Unit
				Min.	Max.	
G001	IF	Forward current (DC)			100	mA
G002	IFSM	Surge forward current	$t_p \leq 10\mu\text{s}$, 5 % duty cycle		1000	mA
G003	VR	Reverse voltage			5	V
G004	P	Power dissipation			150	mW
G005	Tj	Junction temperature		-40	125	$^\circ\text{C}$

THERMAL DATA

Item No.	Symbol	Parameter	Conditions				Unit
				Min.	Typ.	Max.	
T01	Ta	Operating Ambient Temperature Range		-40		125	$^\circ\text{C}$
T02	Ts	Storage Temperature Range		-40		125	$^\circ\text{C}$
T03	Tpk	Soldering Temperature	$t_{pk} < 5\text{ s}$, 3 mm from case			260	$^\circ\text{C}$
T04	Rthja	Thermal Resistance Junction To Ambient			350		K/W

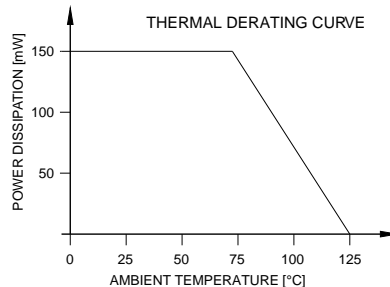


Figure 1: Maximum power dissipation with respect to temperature

ELECTRICAL CHARACTERISTICS

$T_{amb} = 25^\circ\text{C}$, unless otherwise noted

Item No.	Symbol	Parameter	Conditions				Unit
				Min.	Typ.	Max.	
Electrical and Optical Characteristics							
001	VF	Forward voltage	IF = 20 mA		1.4	1.8	
002	VR	Reverse voltage	IR = 5 μA	5			V
003	Φ_e	Radiant power	IF = 20 mA	2.2	4.0		mW
004	TK(Φ_e)	Temperature coefficient of radiant power	IF = 20 mA, Tj = 25 $^\circ\text{C}$...125 $^\circ\text{C}$		-0.6		%/K
005	λ_p	Peak wavelength	IF = 20 mA	840	850	860	nm
006	$\Delta\lambda$	Spectral half width	IF = 20 mA		30		nm
008	tr, tf	Switching time	IF = 100 mA, RL = 50 Ω		12		ns

SAFETY ADVICES

Depending on the mode of operation, these devices emit highly concentrated non visible infrared light which can be hazardous to the human eye.

Products which incorporate these devices have to follow the safety precautions given in IEC 60825-1 and IEC 62471.

DESIGN REVIEW: Notes on chip characteristics

iC-TL85 / iC-TL85Z			
No.	Chip Design	Function, Parameter/Code	Description and Application Hints
1	iC-TL85	initial chip release	see datasheet revision A1
2	iC-TL85Z	Maximum Ratings G002 Electrical Characteristics 003	changed to 1.0 A min. / typ. values increased to 2.2 / 4.0 mW

Table 4: Notes on chip functions regarding iC-TL85 / iC-TL85Z

iC-Haus expressly reserves the right to change its products and/or specifications. An info letter gives details as to any amendments and additions made to the relevant current specifications on our internet website www.ichaus.de/infoletter; this letter is generated automatically and shall be sent to registered users by email.

Copying – even as an excerpt – is only permitted with iC-Haus' approval in writing and precise reference to source.

iC-Haus does not warrant the accuracy, completeness or timeliness of the specification and does not assume liability for any errors or omissions in these materials.

The data specified is intended solely for the purpose of product description. No representations or warranties, either express or implied, of merchantability, fitness for a particular purpose or of any other nature are made hereunder with respect to information/specification or the products to which information refers and no guarantee with respect to compliance to the intended use is given. In particular, this also applies to the stated possible applications or areas of applications of the product.

iC-Haus conveys no patent, copyright, mask work right or other trade mark right to this product. iC-Haus assumes no liability for any patent and/or other trade mark rights of a third party resulting from processing or handling of the product and/or any other use of the product.

iC-TL85 TO46-2F

Infrared LED



Rev B2, Page 4/4

ORDERING INFORMATION

Type	Package	Order Designation
iC-TL85	TO46-2F	iC-TL85 TO46-2F

For technical support, information about prices and terms of delivery please contact:

iC-Haus GmbH
Am Kuemmerling 18
D-55294 Bodenheim
GERMANY

Tel.: +49 (61 35) 92 92-0
Fax: +49 (61 35) 92 92-192
Web: <http://www.ichaus.com>
E-Mail: sales@ichaus.com

Appointed local distributors: http://www.ichaus.com/sales_partners