

iC-OR BLCC OVC3


PACKAGE SPECIFICATION SAMPLES



Rev A1, Page 1/1

ORDERING INFORMATION

Type	Package	Options	Order Designation
iC-OR	BLCC OVC3	none	iC-OR BLCC OVC3
iC-OR	BMST ...		customized packages on request




package available for engineering samples only

PIN CONFIGURATION


PIN FUNCTIONS

(top view)

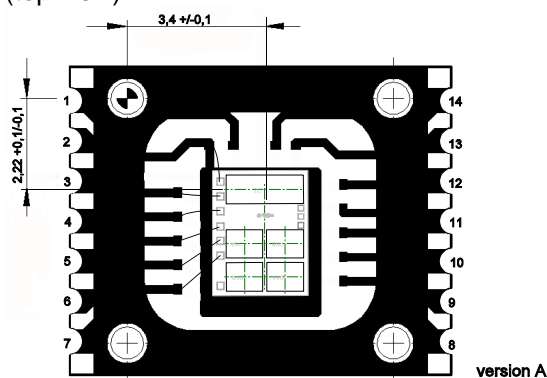

No. Name Function

1	n.c.	
2	AGND	
3	DNA	
4	DPA	
5	DNB	
6	DPB	
7	DZ	
8-14	n.c.	

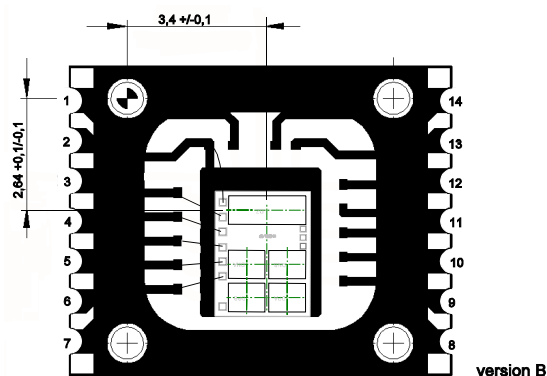

ABSOLUTE MAXIMUM RATINGS

Item	Symbol	Parameter	Conditions	Fig.				Unit
					Min.	Typ.	Max.	
TG1	Ta	Operating Ambient Temperature Range			-30		110	°C
TG2	Ts	Storage Temperature Range			-30		110	°C
TG3	Tl	Lead Temperature	soldering, 10 sec				230	°C

© 2000