


MU28S 34-32N

iC-MU150 MAGNETIC TARGET DESCRIPTION

ORDERING INFORMATION

Type	Order Destination	Description/Options
Magnetic target (rotary, axial)	MU28S 34-32N	2-Track nonius encoder disc, bipolar magnetized Number of pole pairs: master 32, nonius 31 Outer diameter 34 mm, for 18 mm shaft Injection molded permanent magnet material

CODE DISC DIMENSIONS

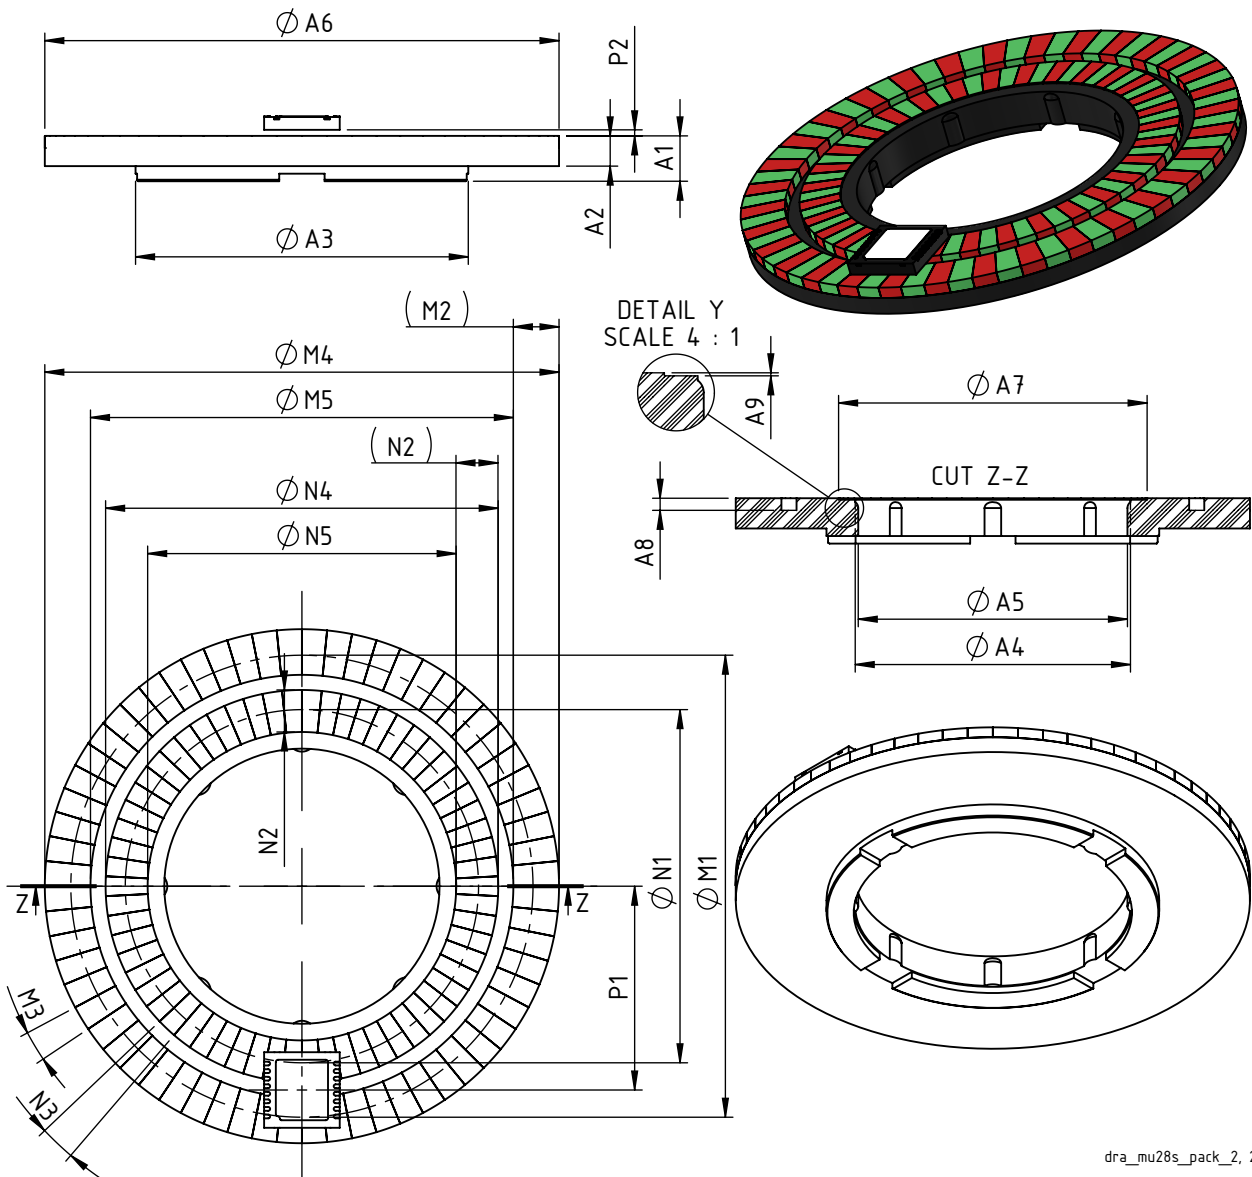

Notice: Interference in function

External magnetic fields can change the functional properties and may reduce system accuracy or damage the disc magnetization. The functionality of the system may no longer be ensured. Direct contact with magnetic clamps or other permanent magnets must be avoided.

MU28S 34-32N

iC-MU150 MAGNETIC TARGET DESCRIPTION

preliminary



Rev A2, Page 2/3

ABSOLUTE MAXIMUM RATINGS

Beyond these values damage may occur; device operation is not guaranteed.

Item No.	Symbol	Parameter	Conditions			Unit
				Min.	Max.	
G001	Bext	Maximum External Magnetic Field Strength		-20	20	mT

THERMAL DATA

Operation conditions: No changes of the magnetic characteristics

Item No.	Symbol	Parameter	Conditions				Unit
				Min.	Typ.	Max.	
T01	Ta	Operating Ambient Temperature Range		-40		125	°C

DIMENSION TABLE

General tolerances according to DIN 16742-TG4 unless otherwise specified. Surfaces according to DIN EN ISO1302.
Carrier material is a combination of polyamide PA6 and hard ferrite.

Item No.	Parameter	Comments					Unit
			Min.	Typ.	Max.	Tolerance	
Physical Dimensions Carrier							
A1	Total Height			3.0		±0.08	mm
A2	Disc Thickness			2.0		±0.05	mm
A3	Diameter of Outer Shaft			22.0		±0.1	mm
A4	Diameter of Bore Hole	for pressing and gluing on 18.0mm shafts		18.2		±0.09	mm
A5	Diameter of Press Ridge			17.8		±0.09	mm
A6	Disc Outer Diameter			34.0		±0.11	mm
A7	Diameter of Cavity			20.4			mm
A9	Depth of Cavity			0.15		+ 0.05 / - 0.1	mm
A8	Depth of Code Free Area			0.8			mm
Magnetic Dimensions Outer Track (Master)							
M1	Scanning-diameter of master track	referred to axial center		30.56			mm
M2	Height of master track			3.02			mm
M3	Pole width of master track	referred to scanning-diameter		1.50			mm
M4	Outer diameter of master track			34.00			mm
M5	Inner diameter of master track			27.96			mm
Magnetic Dimensions Inner Track (Nonius)							
N1	Scanning-diameter of nonius track	referred to axial center		23.36			mm
N2	Height of nonius track			2.78			mm
N3	Pole width of nonius track	referred to scanning-diameter		1.18			mm
N4	Outer diameter of nonius track			25.96			mm
N5	Inner diameter of nonius track			20.40			mm
Recommended Chip Position							
P1	Radial Position of Chip Center	referred to axial center		13.48			mm
P2	Distance Package Surface DFN16-5x5	referred to magnetic coating surface		0.4			mm
P3	Distance Sensor Surface (Bare Die)	referred to magnetic coating surface		0.8			mm
Magnetic Material Characteristics							
Br	Remanence	at 20 °C		235			mT
TKB	Temperature Coefficient of the Remanence	temperature range -40 °C...125 °C		-0.19			%/K
General							
W1	Weight			4.3			g

MU28S 34-32N

iC-MU150 MAGNETIC TARGET DESCRIPTION

preliminary



Rev A2, Page 3/3

REVISION HISTORY

Rel.	Rel. Date*	Chapter	Modification	Page
A1	2018-04-24		Initial releases	

Rel.	Rel. Date*	Chapter	Modification	Page
A2	2018-06-13	DIMENSION TABLE	Magnetic Dimensions Inner Track (Nonius) corrected item M4 → N4 item M5 → N5	2

iC-Haus expressly reserves the right to change its products and/or specifications. An Infoletter gives details as to any amendments and additions made to the relevant current specifications on our internet website www.ichaus.com/infoletter and is automatically generated and shall be sent to registered users by email. Copying – even as an excerpt – is only permitted with iC-Haus' approval in writing and precise reference to source.

The data specified is intended solely for the purpose of product description and shall represent the usual quality of the product. In case the specifications contain obvious mistakes e.g. in writing or calculation, iC-Haus reserves the right to correct the specification and no liability arises insofar that the specification was from a third party view obviously not reliable. There shall be no claims based on defects as to quality in cases of insignificant deviations from the specifications or in case of only minor impairment of usability.

No representations or warranties, either expressed or implied, of merchantability, fitness for a particular purpose or of any other nature are made hereunder with respect to information/specification or the products to which information refers and no guarantee with respect to compliance to the intended use is given. In particular, this also applies to the stated possible applications or areas of applications of the product.

iC-Haus products are not designed for and must not be used in connection with any applications where the failure of such products would reasonably be expected to result in significant personal injury or death (*Safety-Critical Applications*) without iC-Haus' specific written consent. Safety-Critical Applications include, without limitation, life support devices and systems. iC-Haus products are not designed nor intended for use in military or aerospace applications or environments or in automotive applications unless specifically designated for such use by iC-Haus.

iC-Haus conveys no patent, copyright, mask work right or other trade mark right to this product. iC-Haus assumes no liability for any patent and/or other trade mark rights of a third party resulting from processing or handling of the product and/or any other use of the product.

Software and its documentation is provided by iC-Haus GmbH or contributors "AS IS" and is subject to the ZVEI General Conditions for the Supply of Products and Services with iC-Haus amendments and the ZVEI Software clause with iC-Haus amendments (www.ichaus.com/EULA).

* Release Date format: YYYY-MM-DD